

NEW VELUX ACTIVE
INDOOR CLIMATE CONTROL


VELUX®

World-leading skylights and roof windows

Product information and price list 1st June 2019



**OPENABLE FLAT
ROOF SKYLIGHTS**

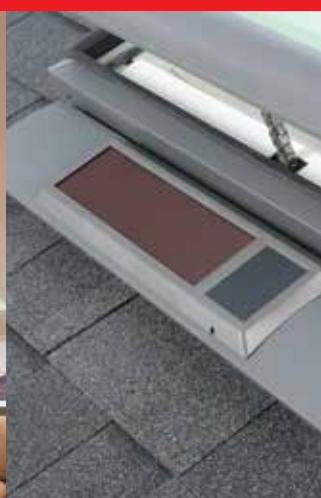

**SOLAR-POWERED
SKYLIGHTS**



**VELUX
ACTIVE**



**STREAMLINED
EXTERIOR**



CodeMark



**HAIL
TESTED**



**BUSHFIRE
BAL40**



**FCM
NT Deemed to Comply**

**CYCLONE
TESTED**



**20+ Videos
VELUX Australia**

Throughout the construction industry, VELUX is a by-word for quality, a reputation that has been painstakingly built up for more than 35 years in Australia and for over 75 years around the world.

Perfectly designed to withstand the world's harshest climatic conditions, all VELUX products are of the highest quality and will perform superbly for a lifetime of faultless service.



Take a look through this guide and judge for yourself. For range, quality, value, guarantees, delivery and service – VELUX is a world leader.

Guaranteed to last...

10 Year Warranty
on all skylights, roof windows and flashings.

3 Year Warranty
on accessories, including electric controls & blinds.



Code Mark® is a voluntary certification scheme owned by the Commonwealth of Australia that provides legally binding evidence of compliance to the Building Code of Australia. One certificate replaces dozens of technical papers.

Surpasses Australian tests for skylights

AS4285 SKYLIGHTS Cyclonic† & Non-Cyclonic	AS1288 OVERHEAD GLAZING Laminated inner pane	AS3959 BUSHFIRE^ Attack Level 40
---	--	--

Window Energy Rating Scheme (WERS)

(MAXIMUM 5 ON WERS SUMMER RATING)



VELUX Skylights and Roof Windows are included in the National Energy Rating programme (AccuRate) as well as state run programmes such as Basix & FirstRate.

Building Code compliance

All VELUX Skylights/Roof Windows (except Sun Tunnels) are deemed non-combustible and thereby comply with BCA Fire Separation requirements i.e. suitable for use within 900mm of a boundary for buildings of Class 1 & 10 (typical residential dwelling)*.

* CSIRO assessment report available on request. VELUX recommends consultation with relevant authority before work commences. Opening models assessed in closed position.


^ Skylight only. Custom-made flashing required. Tested in closed position, fire resistant mesh may be required for opening models. Rigid Sun Tunnel BAL29. Please consult your local council.

† Except GPL Roof Window and Sun Tunnel. VCS/VCM cyclone test not performed with screws provided, installation requires the use of #8 roofing screws.

Glazing

High Performance double glazing

Now standard across entire skylight range

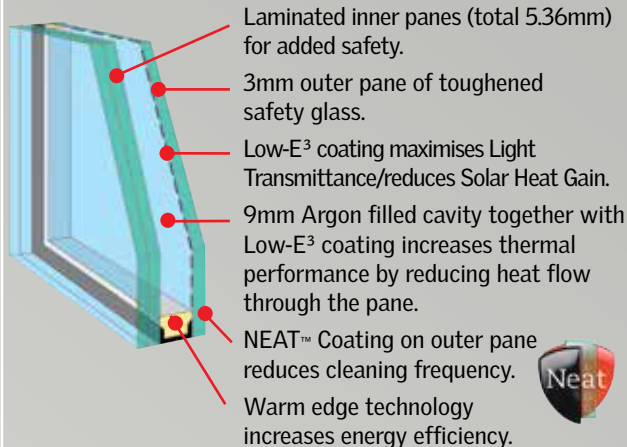

Benefits:

- Radiant heat block: Complete window **approx 75%**
- UV Harmful rays block **approx 99%**
- Noise reduction factor **32 decibels**
- WERS rating **5 stars**
- Double layer of Low-E³ coating.
- 10 year warranty on insulated glass seal.
- Reduced cleaning frequency.

Australian Standard AS1288

Laminated glass (standard) must be used for skylights installed 3m or more above floor level.

NEAT™ Photocatalytic Coating

- Silicone Dioxide/Titanium Dioxide coating reacts with the sun's UV rays to decompose surface organic dirt before rinsing away with the next shower of rain, thereby reducing cleaning frequency.
- The coating also makes the glass surface smoother, so water disperses evenly, sheets off and evaporates quickly; thereby minimising water spotting on the pane.

GGL/GPL window pane tint (i.e. colouration) is slightly different to skylight window pane tint.

Smart indoor climate control

NEW
from 1st June

A healthier indoor climate. Automatically!

VELUX ACTIVE

Smart sensor based operation of your VELUX skylights and blinds.

with
NETATMO



See page 5.

VELUX ACTIVE with NETATMO requires an iPhone or iPad, with iOS 9.0 or later. Android: Requires Android 5.0 and higher with access to Google Play.

Pitched Roof Skylights

VSS Solar-powered



VS Manually operated



FS Fixed (non-opening)



Flat Roof Skylights

VCS Solar-powered



VCM Manually operated



FCM Fixed (non-opening)



Sun Tunnels and Roof Windows

TWF Flexible




TWR Rigid



GGL

White
preprinted
finish

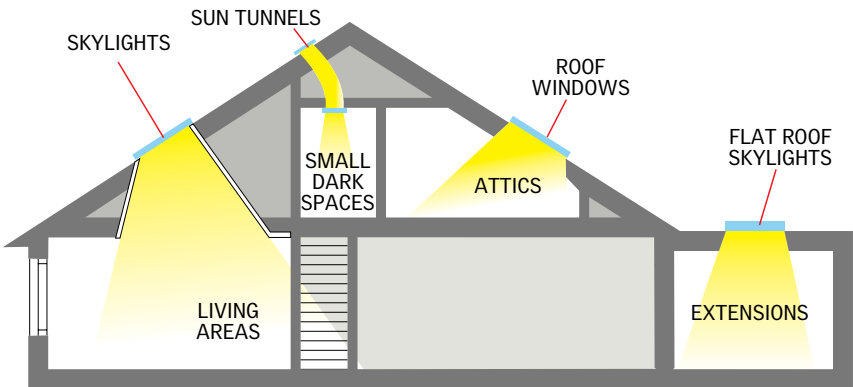

GPL

White
preprinted
finish



Automatic sensor-based ventilation*

Solar-powered Skylight

- Solar panel mounted below the skylight provides all the power needed to operate the skylight.
- Rain sensor automatically closes skylight with on-set of rain.
- Battery power negates power surges and blackouts.
- Easy to install, no need for electrical wiring.

***Requires VELUX ACTIVE**
– sold separately (Page 5)



Pitched Roofs



15°-60°
INSTALLATION PITCH*

VSS

Solar-powered skylight

The ultimate skylight that provides abundant daylight and controllable ventilation. Features a solar panel that captures available daylight to recharge a highly efficient, concealed battery-powered operator and control system.

- Wireless installation. No electrician required.
- White painted interior timber frame and sash.
- Outer aluminium cappings (grey).
- Smooth profile sits lower in the roof, does not obstruct the roofline.
- Available in 9 sizes.
- Wall-mounted key pad.
- Rain sensor automatically closes the skylight when rain is detected.
- High Performance double glazing, with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Complete with flashing for corrugated iron or tile roofs.



3 YEAR
WARRANTY
ON ELECTRICS

Technical Performance

U-value†	
Skylight	2.50
Glass only	1.93

Solar Heat Gain Co-efficient†	
Skylight	0.21
Glass only	0.28

Heat block	
Approx	80%

Bushfire^	
BAL40	

Hailstone Test±	
VELUX Simulated Tests	ASTM E822-2009

WERS max 5 stars (summer rating)	
★★★★★	

Australian Standards	
AS4285	AS1288
AS3959^	AS1530.8.1††



Flat Roofs



0°-60°
INSTALLATION PITCH**

VCS

Solar-powered skylight

The ultimate flat roof skylight that provides abundant daylight and controllable ventilation. Features a solar panel that captures available daylight to recharge a highly efficient, concealed battery-powered operator and control system.

- Wireless installation. No electrician required.
- Maintenance Free – White PVC interior frame for a tough, hard wearing interior finish.
- Outer aluminium cappings (grey).
- Available in 6 sizes.
- Wall-mounted key pad.
- Rain sensor automatically closes the skylight when rain is detected.
- High Performance double glazing, with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Requires custom-made flashing (not supplied by VELUX).



3 YEAR
WARRANTY
ON ELECTRICS

Technical Performance

U-value†	
Skylight	2.9‡
Glass only	1.93

Solar Heat Gain Co-efficient†	
Skylight	0.24
Glass only	0.28

Heat block	
Approx	75%

Bushfire^	
BAL40	

Hailstone Test±	
VELUX Simulated Tests	ASTM E822-2009

WERS max 5 stars (summer rating)	
★★★★★	

Australian Standards	
AS4285#	AS1288
AS3959^	AS1530.8.1††

*See installation preparation guide on page 9.



Also available

VSE

Electrically operated



NEW
from 1st June

VELUX ACTIVE indoor climate control (sold separately)

- **Sensor-based ventilation:** Smart sensors continuously monitor temperature, humidity and CO₂ levels and open or close your skylights accordingly.
- **Stay in control:** Use the app to operate your skylights and blinds using your smartphone.



- Choice of 9 sizes.
- 2 metre lead (supplied) plugs into power point.
- White painted interior timber frame and sash.
- Insect screen, rain sensor and wall-mounted keypad included.

Visit www.velux.com.au for more details.

Solar Powered Blinds

Blockout – DSH (for VSS/VSE), DSC (for VCS)

Honeycomb – FSCH (for VSS/VSE)

- All blinds are available in white.
- Sold separately.
- Easy to fit using the VELUX **Pick&Click!**[®] System.

* For roofs below 15° pitch, VSS/VSE skylights need to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings. (NB: build-up not recommended in Bushfire areas.)

** VELUX recommends VCS is installed with a slight pitch (e.g. 3°-5°) to help prevent condensation build-up and water ponding on the glass.

† U-value (W/m²K) and SHGC data based on AFRC simulations, (complete skylight size; VSS/VSE: 1140mm x 1180mm, VCS: 1275mm x 1275mm).

‡ Cyclone test not performed with screws provided, installation requires #8 roofing screws.

± Hailstone test not performed on solar panel. Solar panel not attached during test.


^ Skylight only. Custom-made flashing required. Skylight tested in closed position (VCS BAL assessed – based on VSS results), additional mesh protection may be required for opening apertures (consult local council). Roof pitch: VSS: 18°-60°, VCS: 0°-60°. †† Assessed in closed position.



Healthy daylight, fresh air
and sky views



Pitched Roofs

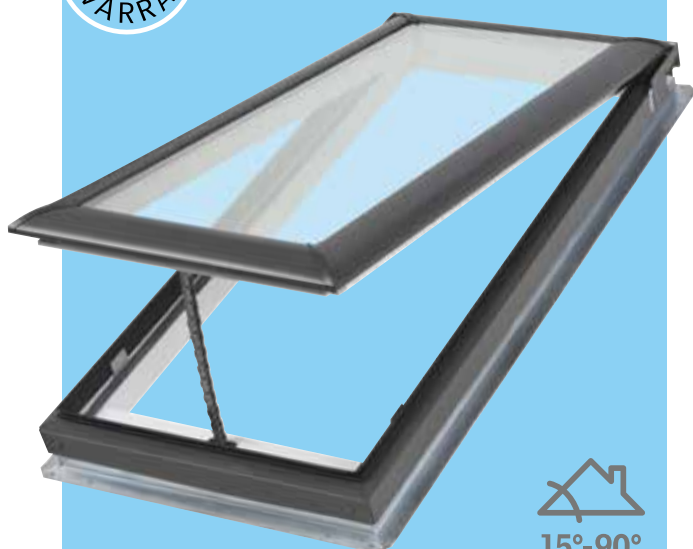

15°-90°
INSTALLATION PITCH**



Flat Roofs



0°-60°
INSTALLATION PITCH**

VS

Manually operated

Provides the comfort and energy savings of free daylight and natural ventilation.

- White painted interior timber frame and sash.
- Outer aluminium cappings (grey).
- Smooth profile sits lower in the roof, does not obstruct the roofline.
- Available in 9 sizes.
- High Performance double glazing as standard; with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Complete with flashing for corrugated iron or tile roofs.
- Operated by winder handle for within-reach situations or by rod for out-of-reach use. (sold separately).



Technical Performance

U-value†	
Skylight	2.50
Glass only	1.93
Solar Heat Gain Co-efficient†	
Skylight	0.21
Glass only	0.28
Heat block	
Approx 80%	
Bushfire^	
BAL40	
Hailstone Test	
VELUX Simulated Tests ASTM E822-2009	
WERS max 5 stars (summer rating)	
★★★★★	
Australian Standards	
AS4285 AS1288	
AS3959^ AS1530.8.1††	

VCM

Manually operated

Cost effective solution for natural ventilation in flat roofs.

- Maintenance free – White PVC interior frame for a tough interior finish.
- Outer aluminium cappings (grey).
- Available in 6 sizes.
- High Performance double glazing as standard; with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Requires custom-made flashing (not supplied by VELUX).
- Operated by winder handle for within-reach situations or by rod for out-of-reach use. (sold separately).



Technical Performance

U-value†	
Skylight	2.9‡
Glass only	1.93
Solar Heat Gain Co-efficient†	
Skylight	0.24
Glass only	0.28
Heat block	
Approx 75%	
Bushfire^	
BAL40	
Hailstone Test	
VELUX Simulated Tests ASTM E822-2009	
WERS max 5 stars (summer rating)	
★★★★★	
Australian Standards	
AS4285# AS1288	
AS3959^ AS1530.8.1††	

‡See installation preparation guide on page 9.

Blinds for VS

Solar-Powered Blockout – DSH
Solar-Powered Honeycomb – FSCH
Blinds include wireless, wall-mounted keypad.



- All blinds are available in white. • Sold separately.
- Easy to fit using the VELUX **Pick&Click!**® System.

Manual control options VS (sold separately)

- Winder handle for operating within-reach.
- Telescopic rod control for out-of-reach situations. (145cm in length, extendable up to 285cm.)



- Short control rod. 60cm long.

Blinds for VCM

Solar-Powered Blockout – DSC
includes wireless, wall-mounted keypad.



- All blinds are available in white. • Sold separately.
- Easy to fit using the VELUX **Pick&Click!**® System.

Manual control options VCM (sold separately)

- Winder handle for operating within-reach.
- Telescopic rod control for out-of-reach situations. (145cm in length, extendable up to 285cm.)



- Short control rod. 60cm long.

* For roofs below 15° pitch, VS needs to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings. (NB: build-up not recommended in Bushfire areas.)

** VELUX recommends VCM is installed with a slight pitch (e.g. 3°-5°) to help prevent condensation build-up and water ponding on the glass.

† U-value (W/m²K) and SHGC data based on AFRC simulations, (complete skylight size; VS: 1140mm x 1180mm, VCM: 1275mm x 1275mm).

VCM Cyclone test not performed with screws provided, installation requires #8 roofing screws. †† Assessed in closed position.

^ Custom-made flashing required. Skylight tested in closed position, additional mesh protection may be required for opening apertures (consult local council). Roof pitch; VS: 18°-75°, VCM: 0°-60°.

NB: BCA 2013 Vol 1 & 2 regulations (Prevention of Falls from Windows – Balustrades & Barriers): contact VELUX for information relating to restrictor devices for within-reach opening skylights.

Outstanding daylight provision

where extra ventilation is not required

FCM skylights: Versatile double-glazed alternative to acrylic domes.



Old acrylic domes can be easily damaged.

FCM SKYLIGHTS ARE IDEAL REPLACEMENTS** FOR ACRYLIC DOMES
10 sizes available to replace common acrylic dome sizes.

In simulated tests* VELUX skylights withstood hailstones, up to the size of cricket balls, launched at speeds experienced during heavy storms.



See Hail Storm case study.
www.velux.com.au

** Custom-made collar adaptor (not supplied) required to fit.

*ASTM E822-2009 standard practice for determining resistance of Solar Collector Covers to Hail impact with propelled ice balls.



Pitched Roofs



FS

Fixed (non opening)


Cost effective for creating light-filled rooms where adequate ventilation already exists. Energy efficient glazing and the use of blinds ensure heat transference is minimised.

- White painted interior timber frame.
- Outer aluminium cappings (grey).
- Complete with flashing for corrugated iron or tile roofs.
- High Performance double glazing as standard; with NEAT™ outer coating: reduces cleaning frequency.
- Smooth profile sits lower in the roof, does not obstruct the roofline.
- Available in 9 sizes.

Technical Performance	
U-value†	
Skylight	2.60
Glass only	1.93
Solar Heat Gain Co-efficient†	
Skylight	0.24
Glass only	0.28
Heat block	
Approx 75%	
Bushfire^	
BAL40	
Hailstone Test	
VELUX Simulated Tests ASTM E822-2009	
WERS max 5 stars (summer rating)	
★★★★★	
Australian Standards	
AS4285 AS1288	
AS3959^ AS1530.8.1	



Flat Roofs

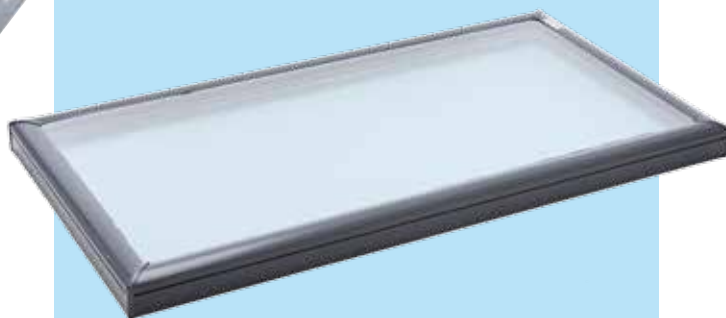

FCM

Fixed (non opening)

The brilliantly simple FCM flat roof skylight incorporates the VELUX High Performance double glazed, laminated unit and an all-metal exterior frame.

- Unlike acrylic or polycarbonate – laminated glass will not fade nor discolour over time.
- The smooth exterior gives a lower profile on the roof.
- High Performance double glazing as standard; with NEAT™ outer coating: reduces cleaning frequency.
- Approx 99% UV Block.
- Available in 10 sizes.
- Maintenance-free anodized heavy-gauge aluminium frame.
- Requires custom-made flashing (not supplied by VELUX).
- Versatile positioning††: most sizes can be used in portrait, landscape or even "diamond shape" orientation.

Technical Performance	
U-value†	
Skylight	2.9‡
Glass only	1.93
Solar Heat Gain Co-efficient†	
Skylight	0.28
Glass only	0.28
Heat block	
Approx 70%	
Bushfire^	
BAL40	
Hailstone Test	
VELUX Simulated Tests ASTM E822-2009	
WERS max 5 stars (summer rating)	
★★★★★	
Australian Standards	
AS4285 AS1288	
AS3959^ AS1530.8.1	



Blinds for FS

Manual Honeycomb – FHCD

requires ZXT 200 rod control for out-of-reach.




Solar-powered Blockout – DSD Solar-powered Honeycomb – FSCD

includes wireless, wall-mounted keypad.



- All blinds are available in white.
- Sold separately.
- Easy to fit using the VELUX **Pick&Click!**® System.

Preparation guide for custom-made flashing

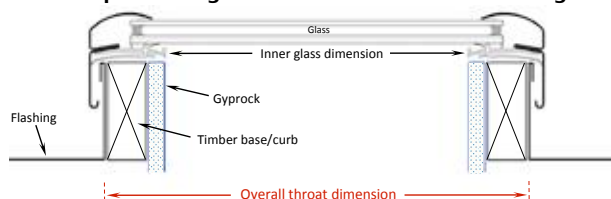

Timber curb must not exceed 38mm – otherwise Gyprock, when installed, will encroach upon glass area.

‡Skylight must be installed with timber hob and Gyprock, as shown (typical installation), to achieve 2.9 U-value rating.

* For roofs below 15° pitch, FS needs to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings. (NB: build-up not recommended in Bushfire areas.)

** VELUX recommends FCM is installed with a slight pitch (e.g. 3°-5°) to help prevent condensation build-up and water ponding on the glass.

† U-value (W/m²K) and SHGC data based on AFRC simulations, (complete skylight size; FS: 1140mm x 1180mm, FCM: 1275mm x 1275mm).

^ Skylight only. Custom-made flashing required. Roof pitch; FS: 18°-75°, FCM: 0°-60°.

†† FCM 2270 not recommended for "landscape" orientation.

Transform wasted attic space
into fantastic loft living





For Attic Conversions



for within-reach only



15°-90°
INSTALLATION PITCH*

GGL

Centre-Pivot roof window



Beautifully engineered for a lifetime of use, the GGL is ideal for within-reach attic situations.

- A short pull on the top control bar allows filtered background ventilation even while the window remains shut.
- A second pull on the control bar allows the window to rotate for maximum ventilation – and up to 180° for cleaning the outer pane from inside the room.
- Quality white painted pine sash & frame.
- Complete with flashing for corrugated iron or tile roofs.
- Available in 5 sizes.
- Laminated double glazing as standard.

Technical Performance

U-value†	
Roof Window	1.30
Glass only	1.00

Solar Heat Gain Co-efficient†	
Skylight	0.31
Glass only	0.30

Heat block	
Approx 70%	

UV Harmful Rays Block	
Approx 95%	

Bushfire^	
BAL40	

WERS max 5 stars (summer rating)	
★★★★★	

Australian Standards	
AS4285 AS1288	
AS3959^ AS1530.1††	



For Attic Conversions



for within-reach only



15°-55°
INSTALLATION PITCH*

GPL

Dual action roof window



Developed for use in attics with shallower pitched roofs to maximise roof top views. For within-reach situations only.

- Opens in two ways: the bottom handle allows for top-hung opening; a short pull on the top control bar allows filtered background ventilation even while the window remains shut.
- A second pull on the control bar allows the window to rotate for maximum ventilation – and up to 180° for cleaning the outer pane from inside the room.
- Quality white painted pine sash & frame.
- Complete with flashing for corrugated iron or tile roofs.
- Available in 5 sizes.
- Laminated double glazing as standard.
- Insect screen available as extra.

Technical Performance

U-value†	
Roof Window	1.30
Glass only	1.00

Solar Heat Gain Co-efficient†	
Skylight	0.31
Glass only	0.30

Heat block	
Approx 70%	

UV Harmful Rays Block	
Approx 95%	

Bushfire^	
BAL40	

WERS max 5 stars (summer rating)	
★★★★★	

Australian Standards	
AS4285† AS1288	
AS3959^ AS1530.1††	

Blinds for GGL/GPL

Manual Blockout – DKL Manual Honeycomb – FHC

- All blinds available in white • Easy to fit using the VELUX **Pick&Click!**® System • Sold separately

NB: NEW VELUX blinds and flashings do not fit older Roof Windows. Contact VELUX to check availability of suitable blinds and flashings.

Opening Restrictors

BCA Vol 1 & 2 regulations (Prevention of Falls from Windows – Balustrades & Barriers): contact VELUX for information relating to restrictor devices for within-reach opening roof windows.

* For roofs below 15° pitch, roof windows need to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings. (NB: build-up not recommended in Bushfire areas.)

† U-value (W/m²K) and SHGC calculated according to EN 14351-1:2006 + A2:2016 (window size 1140mm x 1400mm).

^ Bushfire testing applicable to GGL in roof pitch 18°-75° and GPL in roof pitch 18°-55°. Roof window only. Custom-made flashing required. Roof window tested in closed position, additional mesh protection may be required for opening apertures (consult local council).

‡ Except Cyclonic.

†† Assessed in closed position.



VELUX Blinds – effective light control

VELUX has a choice of blinds that provide different levels of light control. Tailor-made to fit perfectly to each size of skylight or roof window, they are easy to install and are supplied with aluminium side channels that allow the blind to be positioned at any point down the window.



Blockout blinds



Provide near complete blockout from light.

- Blind can be stopped at any position on the window.
- Reduce light by approx 100%.
- Reduce heat by approx 40%*.
- Available in white only.

Honeycomb blinds



A stylish and modern blind providing protection from heat and glare while providing a near complete blockout from light. Manual or solar powered versions available.

- Honeycomb structured material.
- Reduce light by approx 95%.
- Reduce heat by approx 60%*.
- Available in white only.

Pick&Click!®



The innovative VELUX **Pick&Click!®** system makes installing our blinds a snap!

Installation is simple if window is within easy reach.

Blind options

Blind to fit	Manual Blockout	Manual Honeycomb	Solar Powered Blockout**	Solar Powered Honeycomb**
FS		✓ [^]	✓	✓
VS			✓	✓
VSS/E			✓	✓
VCS			✓	
VCM			✓	
GGL	✓	✓		
GPL	✓	✓		

[^] Manual Blinds for Fixed Skylights require ZXT 200 rod control for out-of-reach situations.

**Solar powered blinds include wireless wall-mounted keypad (KLI 312).

Contact VELUX for information on blinds for FCM.

NB: NEW VELUX blinds do not fit older VELUX products. Contact VELUX to check availability of suitable blinds.

* Based on VELUX internal testing with 3076 model roof window.

NB: VELUX recommends retracting blinds during windy conditions if skylight is open.

Sun Tunnels



Time-saving design

The VELUX Sun Tunnel has been designed to make installation quick and easy. Tube assembly is simple so little time is spent in the roof cavity.

The VELUX flexible (TWF) and rigid (TWR) Sun Tunnels provide installation flexibility. Rigid tunnels are most suited to roof spaces with minimal obstructions. They have a highly reflective shaft to achieve maximum light output. Flexible tunnels can be used when obstructions in the roof cavity prevent the use of rigid Sun Tunnels.

VELUX Sun Tunnels for pitched roofs are designed to provide natural light into corridors, stairwells, bathrooms and cupboards; where installation of a VELUX Skylight is not possible.



(TWR pictured)




CORRIDORS AND STAIRWELLS

BATHROOMS, EN-SUITES

DAYLIGHT WHERE YOU WANT

AFTER

BEFORE



Product features:

- Choice of highly reflective rigid or flexible tunnel (350mm diameter, lengths vary – details on page 15).
- 4mm toughened external glass.
- Dual-layered ceiling diffuser – spreads light over an area of up to 9m².
- Interior diffuser with 'Edge Glow', a clear ring on the diffuser's edge.
- Outer polyurethane cappings with integrated flashings for tiled/corrugated iron roofs.
- 'Stay clean' coating on glass exterior reduces cleaning frequency.
- Easier and quicker to install with VELUX Flexi Loc system. (TWR).

TWR
Technical Performance
Bushfire [^]
BAL29
Australian Standards
AS4285 (Except cyclonic)
AS3959 [^]

Bushfire Rating
BAL29
(TWR only)

* Sun Tunnels are not suitable for roof pitches below 15°.


[^] Bushfire testing applicable to roof pitches 18°-60°. TWR only.

Opening Skylights (pitched roofs)



15°-90° (VSS 15°-60°)

Overall frame dimension w x h mm ▶

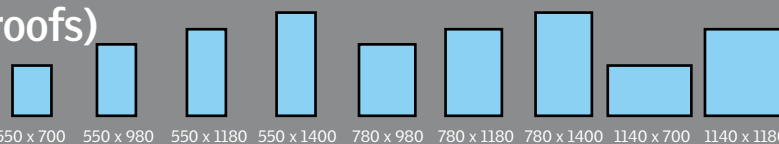

Manual

Page 7

Size code ▶

C01 C04 C06 C08 M04 M06 M08 S01 S06

VS High Performance double glazing

(RRP) \$

871 888 950 1,002 1,030 1,120 1,210 1,098 1,364

Package includes: Flashing for single skylight[†] in corrugated iron or tile roof (not suitable for metal profiles such as Klip-Lok, Trimdek), insect screen and operating hook. NB: Operating Rod (ZCT 300, ZOZ 032) for out-of-reach operation and winder handle (ZZZ 201 for within-reach operation) to be purchased separately.

Solar/Electric

Page 5

Size code ▶

C01 C04 C06 C08 M04 M06 M08 S01 S06

VSS (Solar) High Performance double glazing

(RRP) \$

2,053 2,080 2,140 2,198 2,227 2,323 2,420 2,318 2,580

VSE (Electric) High Performance double glazing

(RRP) \$

1,910 1,934 1,990 2,045 2,072 2,161 2,249 2,157 2,400

Package includes: Flashing for single skylight[†] in corrugated iron or tile roof (not suitable for metal profiles such as Klip-Lok, Trimdek), insect screen, pre installed motor, wall-mounted keypad and rain sensor, solar panel included with VSS.

Blinds^{††}

(VS, VSS & VSE) Page 12

Size code ▶

C01 C04 C06 C08 M04 M06 M08 S01 S06

DSH Solar Blockout[^], White (VS, VSS, VSE)

(RRP) \$

479 479 479 479 489 489 489 499 499

FSCH Solar Honeycomb[^], White (VS, VSS, VSE)

(RRP) \$


479 479 479 479 489 489 489 499 499

Fixed Skylights (pitched roofs)



15°-90°

Overall frame dimension w x h mm ▶

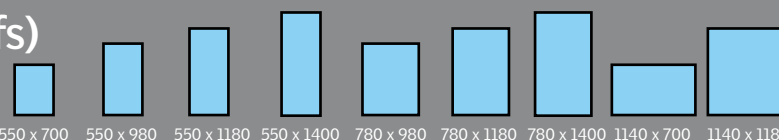

Fixed

Page 9

Size code ▶

C01 C04 C06 C08 M04 M06 M08 S01 S06

FS High Performance double glazing

(RRP) \$

491 559 638 710 680 762 846 759 892

Package includes: Flashing for single skylight[†] in corrugated iron or tile roof (not suitable for metal profiles such as Klip-Lok, Trimdek).

Blinds^{††}

(FS) Page 12

Size code ▶

C01 C04 C06 C08 M04 M06 M08 S01 S06

FHCD Manual Honeycomb^{**}, White (FS)

(RRP) \$

175 190 200 210 200 220 235 210 250

FSCD Solar Honeycomb[^], White (FS)

(RRP) \$

479 479 479 479 489 489 489 499 499

DSD Solar Blockout[^], White (FS)

(RRP) \$

479 479 479 479 489 489 489 499 499


Opening Roof Windows

Recommended for within-reach situations only



15°-90° (GPL 15°-55°)

Overall frame dimension w x h mm ▶

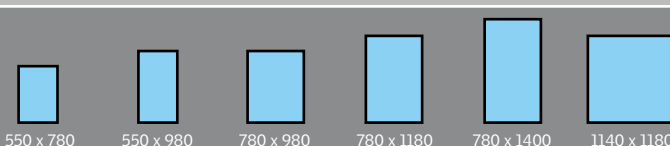

Manual

Page 11

Size code ▶

CK02 CK04 MK04 MK06 MK08 SK06

GGL Centre-pivot, Laminated double glazing

(RRP) \$

690 730 845 - 1,020 1,260

GPL Dual action, Laminated double glazing

(RRP) \$

- 810 919 1,009 1,130 1,321

Package includes: Flashing for single window[†] in corrugated iron or tile roof (not suitable for metal profiles such as Klip-Lok, Trimdek).

ZIL Insect Screens (For GPL)

(RRP) \$

239 239 294 294 294 327

ZIL Insect Screen is fitted to ceiling to cover plaster reveal. Suitable for within-reach applications only. NB: side channel length to be cut to size.

Blinds^{††}

(GGL, GPL) Page 12

Size code ▶

CK02 CK04 MK04 MK06 MK08 SK06

DKL Manual Blockout, White (GGL, GPL)

(RRP) \$

176 189 195 208 228 243

FHC Manual Honeycomb, White (GGL, GPL)

(RRP) \$

176 189 195 208 228 243

†† NEW VELUX blinds and flashings do not fit older VELUX products. Contact VELUX to check availability of suitable blinds and flashings.

* For roofs below 15° pitch, skylights and roof windows need to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings.

**Requires ZXT 200 control rod for out-of-reach situations (sold separately). NB: VELUX recommends Solar Blinds for exceptionally high situations.

[^]Wireless wall-mounted keypad supplied.

[†] For multiple skylights/roof windows installed side by side, contact VELUX for information and pricing on combination flashing.

NB: Skylights and roof windows can only be installed as per orientation depicted above.

Delivery time (in working days)#	NSW 1-2	VIC 1-2	SA 3	ACT 1-2	QLD 2-5	NT 3-7	TAS 3-5	WA 1-2 [§]
----------------------------------	---------	---------	------	---------	---------	--------	---------	---------------------

Metropolitan areas only. Subject to order being received by VELUX before 12 EST noon. Add extra working day to delivery time for orders received by VELUX after 12 EST noon.
§ Subject to availability at Perth warehouse.

Price list effective June 2019. All prices are supply only and include GST. Prices subject to change without notice. All prices quoted are Recommended Retail Prices (RRP) only.

Opening Skylights (flat roofs)



0°-60°

Overall throat dimension w x h mm ▶

665 x 665

665 x 970

665 x 1275

870 x 870

870 x 1275

1275 x 1275

Manual Page 7

Size code ▶

2222

2234

2246

3030

3046

4646

VCM High Performance double glazing

(RRP) \$

880

950

1050

1100

1195

1400

Package includes: Insect screen and operating hook. Custom flashings are required for VCM (not provided) – VELUX can assist with technical advice and drawings.
NB: Operating Rod (ZCT 300, ZOZ 032) for out-of-reach operation and winder handle (ZZZ 212 for within-reach operation) to be purchased separately.
NB: VCM can only be installed as per orientation depicted above.

Solar Page 5

Size code ▶

2222

2234

2246

3030

3046

4646

VCS High Performance double glazing

(RRP) \$

2024

2140

2280

2288

2400

2515

Package includes: Insect screen, pre installed motor, wall-mounted keypad, rain sensor and solar panel.
Custom flashings are required for VCS (not provided) – VELUX can assist with technical advice and drawings.
NB: VCS can only be installed as per orientation depicted above.

Blinds (VCM/VCS) Page 12

Size code ▶

2222

2234

2246

3030

3046

4646

DSC Solar Blockout, White, Wireless wall-mounted keypad supplied

(RRP) \$

479

479

479

489

489

529

Fixed Skylights (flat roofs) Page 9



0°-60°

Inner glass dimension w x h mm ▶

368 x 775

572 x 572

572 x 775

572 x 876

572 x 1181

572 x 1792

775 x 775

775 x 1181

876 x 876

1181 x 1181

Overall throat dimension w x h mm ▶

460 x 870

665 x 665

665 x 870

665 x 970

665 x 1275

665 x 1885

870 x 870

870 x 1275

970 x 970

1275 x 1275

Size code ▶

1430

2222

2230

2234

2246

2270

3030

3046

3434

4646

FCM High Performance double glazing

(RRP) \$

263

286

310

330

373

673

361

460

410

509

NB: FCM can be positioned in portrait or landscape (FCM 2270 not recommended for landscape orientation).
Custom flashings are required for FCM (not provided) – VELUX can assist with technical advice and drawings. Contact VELUX for information on blinds for FCM.

Sun Tunnels Page 13



15°-60°

Tunnel diameter 350mm



460 x 460

TWF 0K14 Sun Tunnel with **flexible** shaft – 2200mm long, 350mm diameter

(RRP) \$ 330

TWR 0K14 Sun Tunnel with **rigid** shaft – 1650mm long, 350mm diameter

(RRP) \$ 549

ZTR 0K14 **Rigid** extension – 1240mm (NOT suitable for TWF)

(RRP) \$ 220

Package complete with integrated flashing for tiled or corrugated iron roofs (not suitable for metal profiles such as Klip-Lok, Trimdek), tunnel and ceiling diffuser.
Sun Tunnels are not suitable for roof pitches below 15°.

Electric and Rod Controls

ZZZ 201 Winder handle (white) to operate VS openable skylights within reach



(RRP) \$ 36

ZZZ 212 Winder handle (white) to operate VCM openable skylights within reach




(RRP) \$ 36

ZOZ 032 Short rod control (60cm) to operate within reach, manual openable skylights




(RRP) \$ 43

ZCT 300 Extendable rod control to operate manual openable skylights. 145cm – 285cm length



(RRP) \$ 58

ZXT 200 Extendable rod control to operate manual fixed skylight blinds. 100cm – 180cm length



(RRP) \$ 50

NEW **KIX 300** VELUX ACTIVE starter kit – includes 1 x internet gateway, 1 x climate sensor, 1 x departure switch




(RRP) \$ 449

NEW **KLA 300** VELUX ACTIVE indoor climate sensor
Additional climate sensors recommended if multiple rooms contain opening skylights



(RRP) \$ 200

KLF 200 Interface Unit. Connect to building managements systems, sensors and switches
Individual control of 5 products (or groups), up to 200 products in total



(RRP) \$ 545

From 1st June

From 1st June

Delivery time (in working days)# NSW 1-2 VIC 1-2 SA 3 ACT 1-2 QLD 2-5 NT 3-7 TAS 3-5 WA 1-2[§]

Metropolitan areas only. Subject to order being received by VELUX before 12 EST noon. Add extra working day to delivery time for orders received by VELUX after 12 EST noon.
§ Subject to availability at Perth warehouse.

Price list effective June 2019. All prices are supply only and include GST. Prices subject to change without notice. All prices quoted are Recommended Retail Prices (RRP) only.

VELUX SKYLIGHTS & ROOF WINDOWS SIZE AVAILABILITY (mm's)

700	VS VSE VSS FS C01			VS VSE VSS FS S01
780	GGL CK02			
980	VS VSE VSS FS C04 GGL GPL CK04	VS VSE VSS FS M04 GGL GPL MK04		
1180	VS VSE VSS FS C06	VS VSE VSS FS M06 GPL MK06		VS VSE VSS FS S06 GGL GPL SK06
1400	VS VSE VSS FS C08	VS VSE VSS FS M08 GGL GPL MK08		
	◀ 550 ▶	◀ 780 ▶	◀ 1140 ▶	

VELUX FLAT ROOF GLAZED SKYLIGHTS SIZE AVAILABILITY (mm's)

665	FCM VCS VCM 2222			
870	FCM 1430	FCM VCS VCM 2230	FCM VCS VCM 3030	
970		FCM VCS VCM 2234	FCM 3434	
1275		FCM VCS VCM 2246	FCM VCS VCM 3046	FCM VCS VCM 4646
1885		FCM 2270	FCM SKYLIGHTS ARE IDEAL REPLACEMENTS FOR ACRYLIC DOMES 10 sizes available to replace common acrylic dome sizes. See P9 for details.	
	◀ 460 ▶	◀ 665 ▶	◀ 870 ▶	◀ 970 ▶

Bringing light to life™

VELUX Australia Pty Ltd
78 Henderson Road, Alexandria NSW 2015

Customer Services: Tel: 1300 859 856

Fax: (02) 9550 3289


E-mail: customer.service@velux.com.au

Instagram: @veluxaustralia

www.velux.com.au

VELUX®

SYDNEY HEAD OFFICE & SHOWROOM

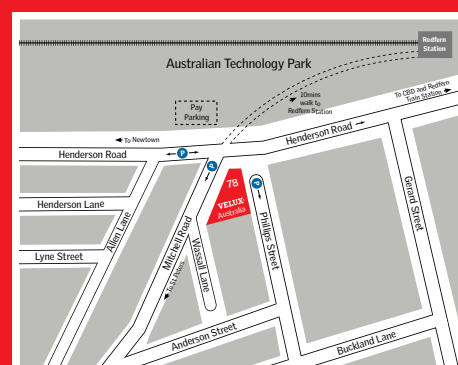

OPENING TIMES:
Sydney Head Office: 8am-5pm (Mon-Fri)
Showroom: 8.30am-4.30pm (Mon-Fri)